

IA332 | IA520

Hardmount Washer-Extractor

Veeco
LAUNDRY SYSTEMS

T: 1300 853 644 W: www.veeco.com.au

VEECO Laundry Systems
1 Granite Place
Welshpool 6106, WA
Phone: 1300 853 644
www.veeco.com.au
IPSO-Partner for Western Australia
& Northern Territory



FEATURES

- Rigid mounted, normal spin, up to 150G factor
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- High capacity water inlets
- Large drain valve (Ø 76 mm)

OPTIONS

- Coin operated
- Stainless steel front and side panels
- Liquid soap connection and pumps
- Steam heating version
- ECO version: Lower kW rating on request
- 3rd water inlet
- High capacity water inlets

CONTROLS OPTIONS

- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



SMART DRUM TECHNOLOGY

Extra mechanical action thanks to its cascading shape of the surface



EXTRA LARGE DOOR OPENING

For easy loading and unloading



HIGH CAPACITY WATER INLETS

For shorter wash cycles




SmartWAVE automatically determines the absorption ability of the load at the start of the cycle, resulting in optimized water levels throughout the cycle.

		IA332	IA520
INNERDRUM			
Capacity 1:09	kg (lb)	37(82)	58(128)
Capacity 1:10	kg (lb)	33(73)	52(115)
Volume	litres	332	520
Diameter	mm	914	914
DRUM SPEED			
Wash	rpm	38	38
Extraction	rpm	540	440
G-FACTOR		150	100
HEATING			
Electricity	kW	27	40,6
Steam	bar	1 - 8	1 - 8
Hot water	°C	90	90
Sound pressure level	dB (A)	< 65	< 65
Water valves connection	BSP	3/4"	1"
Water pressure	kPa	100-800	100-800
Rec. water pressure	kPa	300-500	300-500
Water inlet	l/min	66-188	183-518
Drain valve	outer Ø mm	2x76	2x76
Flow amount with drain valve	l/min	2x210	2x210
Steam valve connection	BSP	3/4"	3/4"
Steam pressure	kPa	100-800	100-800
DIMENSIONS			
Size H*W*D	mm	1500x1060x1030	1500x1060x1315
Net weight	kg	410	520
TRANSPORT DATA			
Packed H*W*D	mm	1625x1088x1060	1625x1088x1345
Gross weight	kg	425	535

* 200 G-factor execution

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S	T
IA332	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
IA520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	W	D	H																

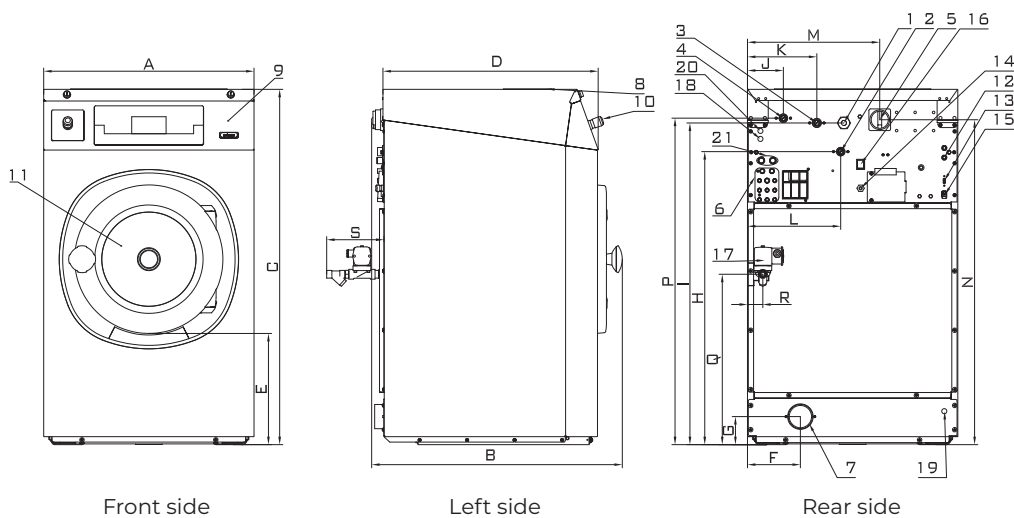

- | | | |
|--------------------------|---------------------------|------------------------------------------------|
| 1. Electrical connection | 6. Liquid soap connection | 11. Door opening (Ø 460mm) |
| 2. Hot water | 7. Drain | 12. Fuses |
| 3. Cold water hard | 8. Soap dispenser | 13. USB port |
| 4. Cold water soft | 9. Control panel | 14. Electrical connection to liquid soap pumps |
| 5. Main switch | 10. Button CENTRALSTOP | |